


NINGBO EXCELLENCE COMMUNICATED CONNECTOR CO.,LTD


宁波卓新通讯接插件有限公司

PLUG:

Drawing						
Mark						
GOLD PLATING	3Mu"	3u"	6u"	15u"	30u"	50u"
Mark						
TYPE	Shielded	Unshielded				
Mark						
PC	UL 94-V0	UL 94-V2				
Mark						

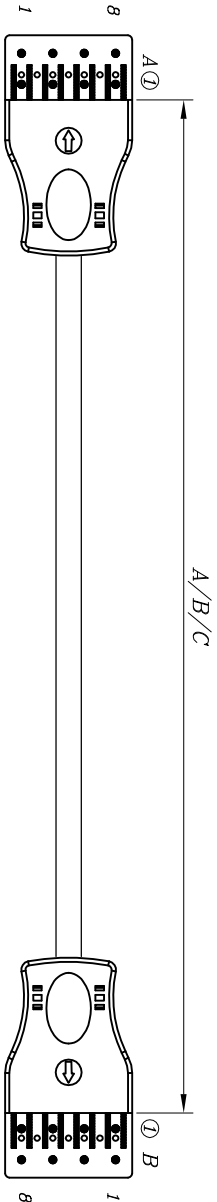

理线方式:



- Remarks:
- I. "A" indicate Length 1~10M( 10M not included), tolerance  $+20$ <sub>-0</sub>
  - II. "B" indicate Length 10-20M(20m included), tolerance  $+150$ <sub>-0</sub>
  - III. "C" indicate Length above 20M( 20m not included), tolerance  $+(C*1\%)/-0$

项次	品名	规格	颜色	用量	项次	品名	规格	颜色	用量	图号
ITEM	DESCRIPTION	MATERIAL	COLOR	Q'TY	ITEM	DESCRIPTION	MATERIAL	COLOR	Q'TY	DWG NO.
①	110	4对	透明	2	⑥					Y5EUT4P-001
②	扎带	"C"MM	白	2	⑦					
③					⑧					
④					⑨					
⑤					⑩					

线材规格		线位				WIRE				CONNECTION				TABLE				名称	
MATERIAL		白/蓝		蓝		白/橙		橙		白/绿		绿		白/棕		棕		TITLE	
CAT.5E UTP PATCH CORD 24AWG(4PR)	PVC	A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12	A13	A14	A15	A16	110-110(4对)	
	LSOH	B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12	B13	B14	B15	B16		
线材颜色选择		红	橙	黄	绿	蓝	紫	灰	白	黑									

单位	UNIT	mm	比例	SCALE	1/1	张数	SHEET	1/1
出图日期	DRAWN DATE	08/10/10	画法	PROJ.		更改	REV	1
审核	CHECKED	沈红波	核对	CHECKED	吴明	制图	DRAWN	CathyLi
审批	APPROVAL							