



NINGBO EXCELLENCE COMMUNICATED CONNECTOR CO.,LTD

PLUG:

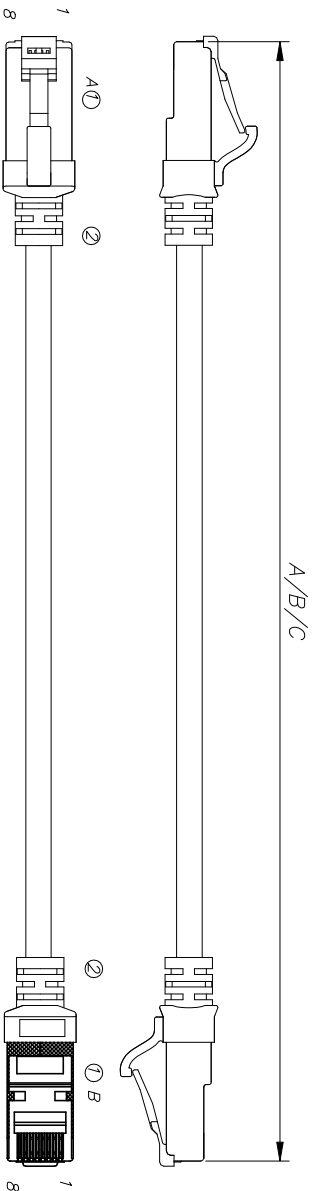


Drawing					
Mark	✓				
GOLD PLATING	3Mu"	3u"	6u"	15u"	30u"
Mark					✓
TYPE	Shielded	Unshielded			
Mark	✓				
PC	UL 94-V0	UL 94-V2			
Mark		✓			

ARRANGE METHOD:



- Smoke Densiti ty: IEC61034-2
  - Hal ogen Amount: IEC60754-2
- Remarks:
- I. "A" indicate the length 1-9M, tolerance +20/-0
  - II. "B" indicate the length 10-20M, tolerance +150/-0
  - III. "C" indicate the length above 20M, tolerance +(C\*1%)/-0



ITEM	DESCRIPTION	MATERIAL	COLOR	Q'TY	ITEM	DESCRIPTION	MATERIAL	COLOR	Q'TY	DWG NO.
①	PLUG	P88RE50V2S(1.0,小鐵 密封孔)	transparent	2	⑥					P5EFTB237-001
②	PVC	30P	✓	4.88g	⑦					TITLE
③	PVC	60P	✓	3.51g	⑧					CAT.5E FTP PATCH CORD
④	Cable Tie	"C"MM	white	2	⑨					
⑤					⑩					
MATERIAL		WIRE CONNECTION		TABLE						
CAT.5E FTP PATCH CORD		PVC	white / orange	white / green	blue	white / blue	green / brown	white / brown	LENGTH	
26AWG		LSOH	A1	A2	A3	A4	A5	A6	A7	A8
			B1	B2	B3	B4	B5	B6	B7	B8
CABLE COLOR		red	orange	yellow	green	blue	purple	gray	white	black
TOTAL		MOLD NO.		UNIT		SCALE		SHEET		
		02-237		MM		1/1		1/1		
		02-238		DRAWN DATE		PROU.		REV		
		2021/11/25		2021/11/25				A		
APPROVAL		CHECKED		DRAWN						
Carline		Zach		CathyLI						