




ARRANGE METHOD:



- Remark:**
- ① Cable: Cat.6 SSTP, Stranded Bare Copper, 4Pairs Wires, 28AWG, Jacket PVC, OD: 5.6mm.
 - ② Plug: Cat.6 Shielded Type Plug with 3 Prongs, 50u", 8P8C, UL94-V2, Mating Cycle >1200.
 - ③ Packing: 1PC/PE Bag with Label.
- Testing: 100% Component Test.
All materials are RoHS compliant.

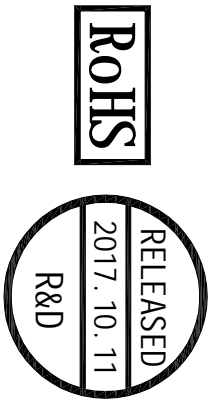

CUT LINE AND ARRANGE CRITERION				CUT LINE AND ARRANGE CRITERION			
No.	Total length (MM)	on of patch cord (MM)	Cable tie (MM)	No.	Total length (MM)	on of patch cord (MM)	Cable tie (MM)
1	300	A	/	19	13000	B	175
2	500	/	/	20	14000	/	180
3	1000	/	/	21	15000	/	205
4	1500	175	60	22	16000	/	210
5	2000	/	70	23	17000	/	215
6	2500	/	75	24	18000	/	220
7	3000	185	80	25	19000	/	225
8	3500	/	95	26	20000	/	235
9	4000	/	100	27	25000	/	265
10	5000	/	110	28	30000	120	315
11	6000	/	120	29	40000	/	365
12	7000	/	130	30	50000	/	415
13	7500	135	135	31	60000	/	465
14	8000	/	140	32	70000	/	515
15	9000	/	145	33	80000	/	565
16	10000	/	150	34	90000	/	615
17	11000	165	155	35	100000	/	665
18	12000	180	175	36	/	/	/

WIRE CONNECTION TABLE								LENGTH		MOLD NO.
white/orange	white/green	blue	white/blue	blue	green	white/brown	white/brown	A	B	01-129
A1	A2	A3	A4	A5	A6	A7	A8	4(+100)/1(90)/1(90/0)	01-129	
B1	B2	B3	B4	B5	B6	B7	B8			

DWG. NO.			P60S/FTTB129-001		
TITLE					
CAT.6 S/FTP SLIM PATCH CORD					
UNIT	SCALE	SHEET			
mm	1/1	1/1			
DRAWN DATE	PROJ.	REV			
2017/10/11	CHECKED	1			
APPROVAL	CHECKED	DRAWN			
Carine	Wuming	CathyLi			