NINGBO EXCELLENCE COMMUNICATED CONNECTOR CO.,LTD

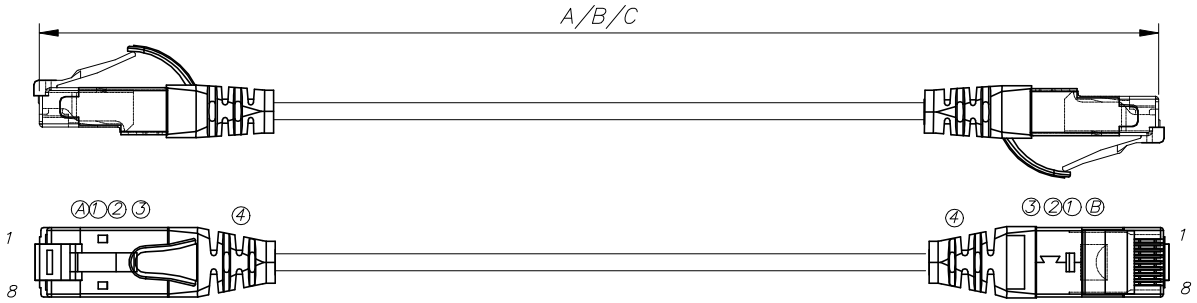

PLUG:

Drawing						
Mark						✓

GOLD PLATING	3Mu"	3u"	6u"	15u"	30u"	50u"
Mark						✓

TYPE	Shielded	Unshielded
Mark	✓	

PC	UL 94-V0	UL 94-V2
Mark		✓

- Smoke Density: IEC61034-2
- Corrosive Gases: IEC60754-2

ARRANGE METHOD:



Remarks:

I. "A" indicate the length 1~9M, tolerance $^{+80}_{-0}$

II. "B" indicate the length 10~20M, tolerance $^{+150}_{-0}$

III. "C" indicate the length above 20M, tolerance +(C*1%)/-0

RoHS

Issued
2021.11.23
R&D

ITEM	DESCRIPTION	MATERIAL	COLOR	Q'TY	ITEM	DESCRIPTION	MATERIAL	COLOR	Q'TY
①	PLUG	C6R5ZC50V2SIL-3E	transparent	2	⑥				
②	Insert	10.7屏蔽加长型 V2	transparent	2	⑦				
③	Cross Insert	3E屏蔽防胶工字架 ø4.8	transparent	2	⑧				
④	PVC	60P	\	8g	⑨				
⑤	Cable Tie	"C"MM	white	2	⑩				

DWG NO. P6AS/FTB167-001

TITLE: CAT.6A S/FTP PATCH CORD

WIRE CONNECTION TABLE

MATERIAL			white / orange	orange	white / green	blue	white / blue	green	white / brown	brown
CAT.6A S/FTP PATCH CORD 30AWG	PVC		A1	A2	A3	A4	A5	A6	A7	A8
	LSOH	✓	B1	B2	B3	B4	B5	B6	B7	B8
CABLE COLOR		red	orange	yellow	green	blue	purple	gray	white	black

LENGTH	TOTAL	MOLD NO.
(A/B/C+80)*[25(0)]*[25(0)]		02-167

UNIT	SCALE	SHEET
mm	1/1	1/1

DRAWN DATE	PROJ.	REV
2017/12/11		1

APPROVAL	CHECKED	DRAWN
Carine	Zach	CathyLi